

## Installation Instructions MD-6517-N Motion Detector

### Instructions


Please follow these instructions to connect the MD-6517-N to the NMEA 2000 network via a Maretron SIM100 Switch Indicator Module. The wiring diagram appears in Figure 1 on the reverse of this page. The diagram shows a connection to channel #1, but connections to other channels are similar.

1. Connect the MD-6517-N power terminals to a 7-16VDC supply that is independent of the NMEA 2000 network power supply as shown in Figure 1 below. Powering the unit separately from the NMEA 2000 network allows the detector to work even when the NMEA 2000 network is powered off.
2. Connect the COM and T/NO terminals to a free switch channel. The example in Figure 1 shows the detector connected to switch channel 1, terminals "SW1A" and "SW1B".
3. Use a Maretron DSM250 display (firmware 1.3.5 or higher), the DSM250 Viewing function of Maretron N2KAnalyzer software, or other Maretron display product capable of configuring the SIM100 to set the switch channel mode (indicated as "Channel #x Mode" on the DSM250) for the appropriate channel to the "End of Line Resistor" setting. For this example, you would set "Channel #1 Mode" to "End of Line Resistor".
4. Supply power to the NMEA 2000 network and to the MD-6517-N and verify that the switch channel indicates an "off" (normal) state using Maretron N2KView software, N2KAnalyzer, or other product capable of displaying switch indicator state.
5. Perform a walktest on the MD-6517-N and verify that the switch channel indicates an "on" (alarm) state during the test.
6. Disconnect one of the alarm wires from the SIM100 and verify that the switch channel indicates an "error" state.
7. Reconnect the alarm wires to the SIM100 and verify that the switch channel indicates an "off" (normal) state.



**WARNING:** The MD-6517-N is shipped with an 8K $\Omega$  end-of-line resistor installed between the COM terminal and the T/NO terminal. Do not remove the resistor, as it is required for proper operation.

(continued on reverse)

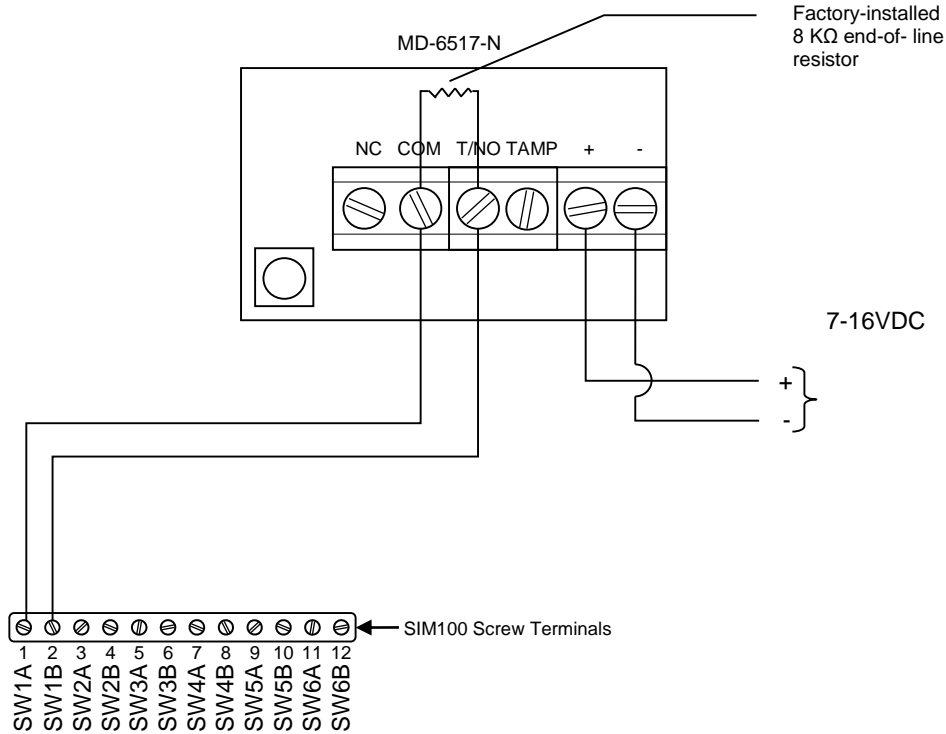

**Figure 1 – Wiring Diagram**

For installation support, please contact:

**Maretron, LLP**  
**9014 N. 23<sup>rd</sup> Ave #10**  
**Phoenix, AZ 85021**  
**Telephone: (+1) 866-550-9100**  
**E-mail: [support@maretron.com](mailto:support@maretron.com)**  
**Web: <http://www.maretron.com>**